


SYSTEM DIAGRAM

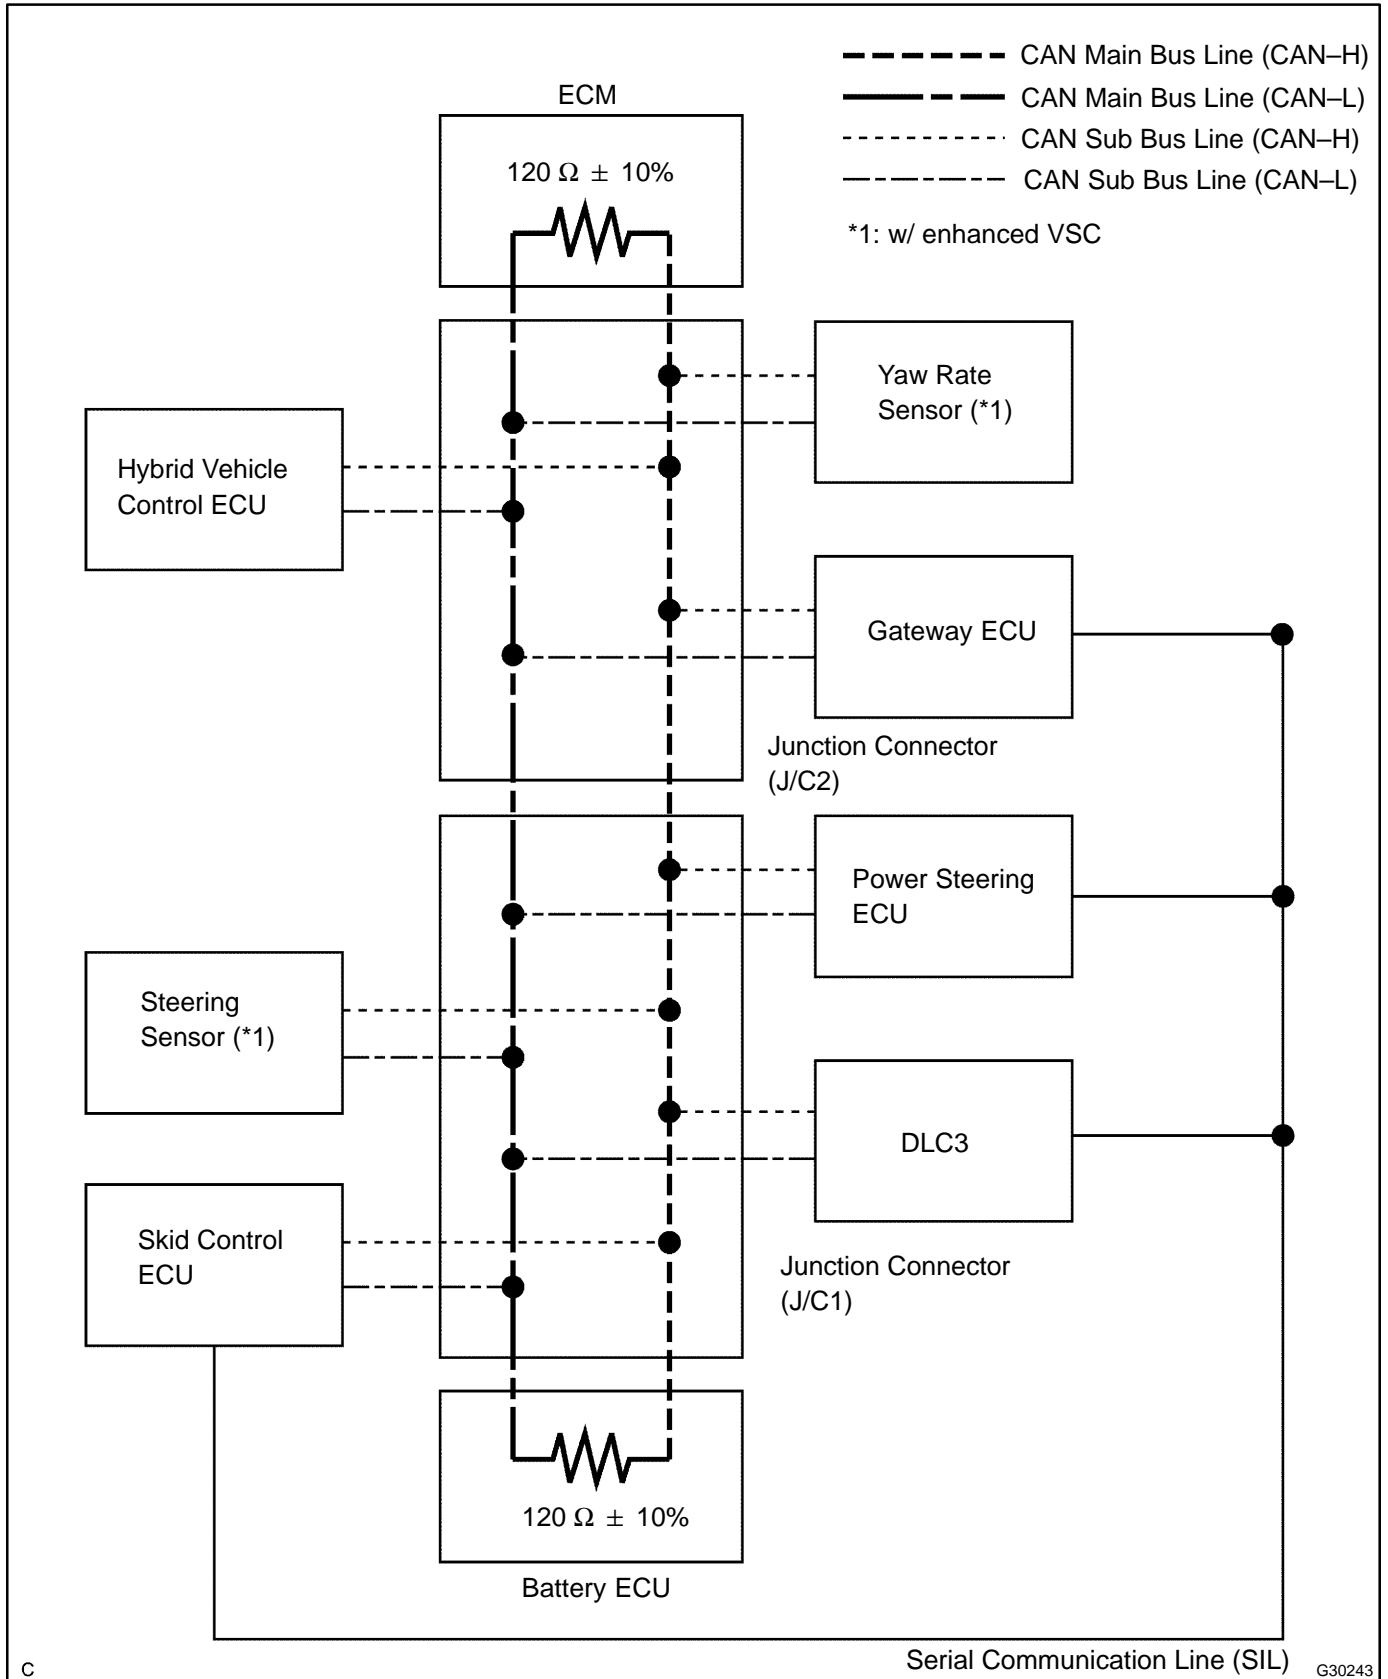

C

Serial Communication Line (SIL)

G30243

HINT:

- The skid control ECU detects and stores steering sensor and yaw rate sensor DTCs and performs DTC communication by receiving information from the steering sensor and yaw rate sensor.
- The ECM, hybrid vehicle control ECU, and battery ECU use the CAN communication system to perform DTC communication instead of the conventional communication line (SIL).