

WIPER RUBBER REPLACEMENT

660HJ-01

1. REMOVE FRONT WIPER BLADE


- (a) Remove the front wiper blade from the front wiper arm.

NOTICE:

Do not fold down the front wiper arm with the front wiper blade removed from it.

2. REMOVE WIPER RUBBER

- (a) Remove the wiper rubber from the front wiper blade.

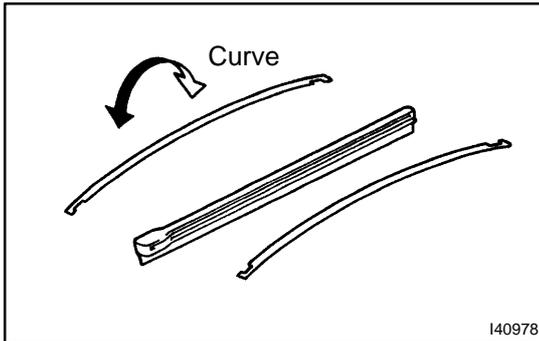

3. INSTALL WIPER RUBBER

- (a) Install the wiper rubber so that the head part (larger side) of the wiper rubber faces the arm axle side.

NOTICE:

Push the front wiper blade into the grooves of the wiper rubber to engage them completely.