

ANTENNA CORD SUB-ASSY NO.2

REPLACEMENT

6716Q-01

HINT:

- COMPONENTS: See page 67-2
- Installation is in the reverse order of removal.


1. REMOVE INSTRUMENT PANEL SUB-ASSY W/PASSENGER AIRBAG ASSY (SEE PAGE 71-7)

HINT:

Refer to the procedures up to "REMOVE INSTRUMENT PANEL SUB-ASSY W/ PASSENGER AIRBAG ASSY".

2. REMOVE ANTENNA CORD SUB-ASSY NO.2

- (a) Disconnect each connector.
- (b) Remove the 3 clamps and disengage the 2 claws, and then remove the antenna cord sub-assy No.2.

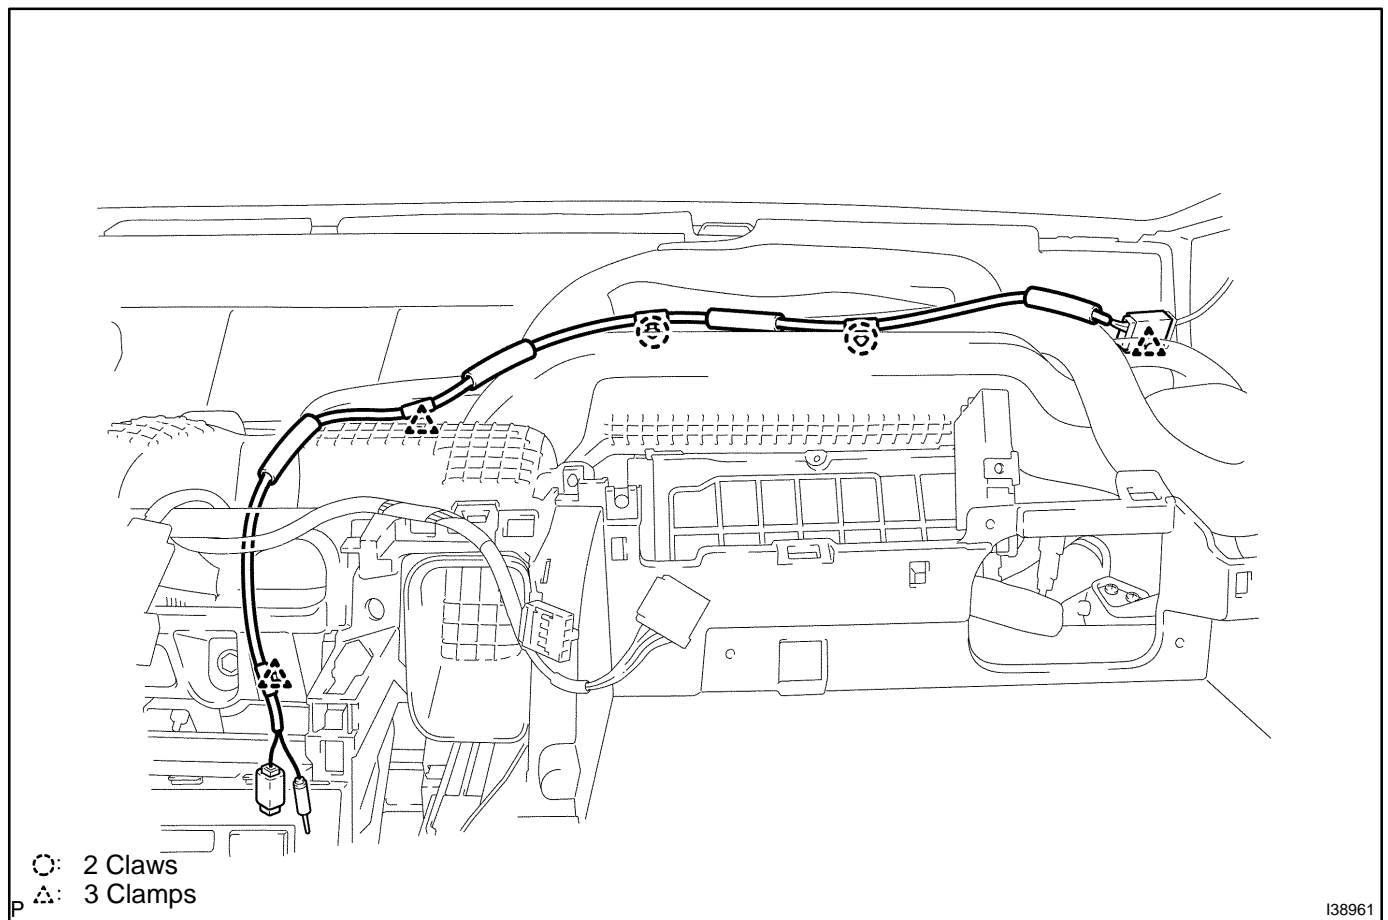

I38961

**3. INSTALL INSTRUMENT PANEL SUB-ASSY W/PASSENGER AIRBAG ASSY
(SEE PAGE 71-7)**

HINT:

Refer to the procedures from "INSTALL INSTRUMENT PANEL SUB-ASSY W/ PASSENGER AIRBAG ASSY".