

REMOVAL



1. DISCONNECT CABLE FROM NEGATIVE BATTERY TERMINAL

CAUTION:

Wait at least 90 seconds after disconnecting the cable from the negative (-) battery terminal to prevent airbag and seat belt pretensioner activation.

2. REMOVE ACCELERATOR PEDAL ROD

- (a) Disconnect the accelerator pedal position sensor connector.
- (b) Remove the 2 bolts and accelerator pedal rod.

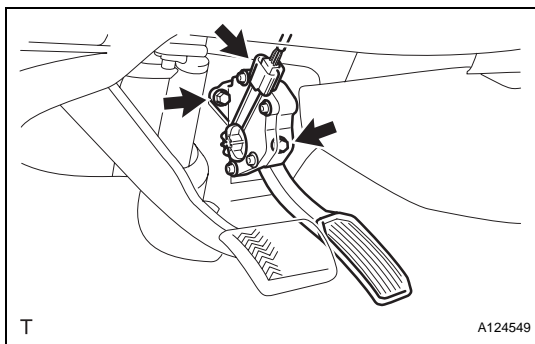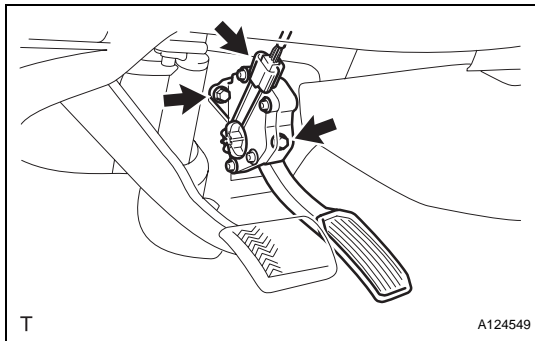

INSTALLATION

1. INSTALL ACCELERATOR PEDAL ROD

- (a) Install the accelerator pedal rod with the 2 bolts.
Torque: 5.4 N*m (55 kgf*cm, 48 in.*lbf)
- (b) Connect the accelerator pedal position sensor connector.

2. CONNECT CABLE TO NEGATIVE BATTERY TERMINAL