

REMOVAL



1. **DISCONNECT CABLE FROM NEGATIVE BATTERY TERMINAL**

CAUTION:

Wait at least 90 seconds after disconnecting the cable from the negative (-) battery terminal to prevent airbag and seat belt pretensioner activation.

2. **REMOVE MASS AIR FLOW METER**

- (a) Disconnect the mass air flow meter connector.
- (b) Remove the 2 screws and mass air flow meter.

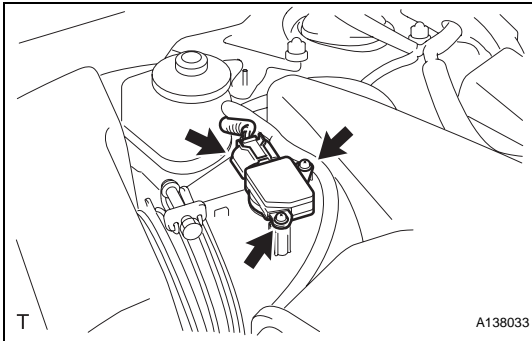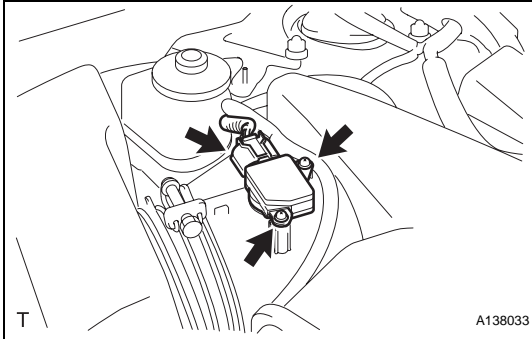

INSTALLATION

1. **INSTALL MASS AIR FLOW METER**

- (a) Install the mass air flow meter with the 2 screws.

NOTICE:

Make sure that the O-ring is not cracked or jammed when installing it.

- (b) Connect the mass air flow meter connector.

2. **CONNECT CABLE TO BATTERY NEGATIVE TERMINAL**