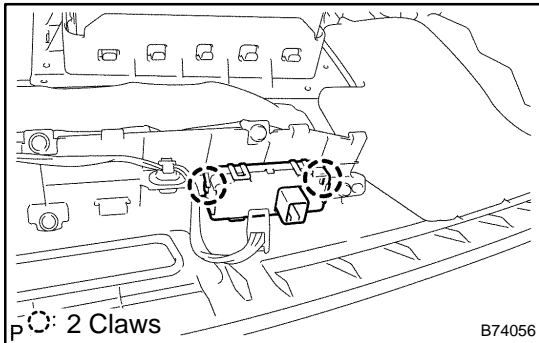


TELLTALE LAMP ASSY REPLACEMENT

710LR-01

HINT:

- Installation is in the reverse order of removal.
 - COMPONENTS: SEE PAGE 71-1
- 1. REMOVE INSTRUMENT PANEL SUB-ASSY W/PASSENGER AIRBAG ASSY
(SEE PAGE 71-7)**

**2. REMOVE TELLTALE LAMP ASSY**

- (a) Disconnect the connector.
- (b) Disengage the 2 claws and then remove the telltale lamp assy.

- 3. INSTALL INSTRUMENT PANEL SUB-ASSY W/PASSENGER AIRBAG ASSY
(SEE PAGE 71-7)**