


HEADLAMP LEVELING ECU ASSY REPLACEMENT

65129-01

1. DISCONNECT BATTERY NEGATIVE TERMINAL (SEE PAGE 60-1)
2. REMOVE GLOVE COMPARTMENT DOOR ASSY (SEE PAGE 71-7)
3. REMOVE ECM (SEE PAGE 10-24)

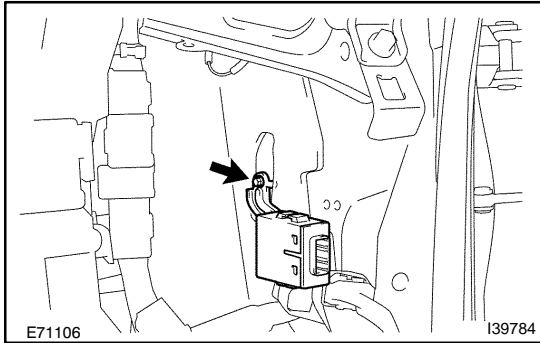

4. REMOVE HEADLAMP LEVELING ECU ASSY
 - (a) Disconnect the connector.
 - (b) Remove the bolt and the headlamp leveling ECU assy.

5. INSTALL ECM (SEE PAGE 10-24)
6. CONNECT BATTERY NEGATIVE TERMINAL (SEE PAGE 21-54)
7. PERFORM INITIALIZATION (SEE PAGE 05-1675)