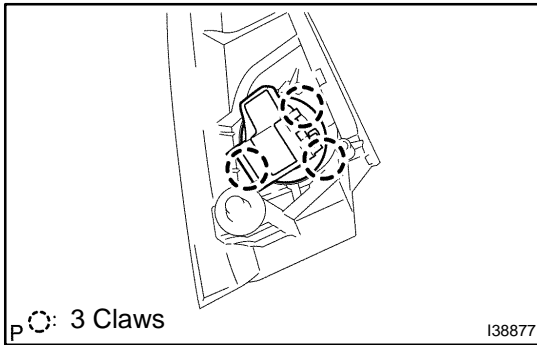


# FRONT NO.2 SPEAKER ASSY REPLACEMENT

6716J-01

**HINT:**

- COMPONENTS: See page [67-2](#)
  - Use the same procedures for the RH side and LH side.
  - The procedures listed below are for the LH side.
  - Installation is in the reverse order of removal.
- 1. REMOVE FRONT DOOR LOWER FRAME BRACKET GARNISH LH (SEE PAGE [75-9](#))**

**2. REMOVE FRONT NO.2 SPEAKER ASSY**

- (a) Disengage the 3 claws and remove the front No.2 speaker assy.