


REPLACEMENT

HINT:

- The installation procedures are the removal procedures in reverse order.
- Use the same procedures for the RH side and LH side.
- The procedures listed below are for the LH side.

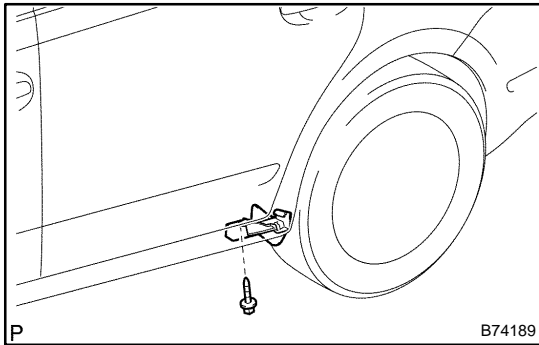

1. REMOVE REAR WHEEL HOUSE PLATE

- (a) Remove the screw and house plate.

2. REMOVE SIDE MUDGUARD

- (a) Remove the screw and 8 retainers.
- (b) Disengage the clip and remove the mudguard.

