


RADIO RECEIVER ASSY REPLACEMENT

6716G-01


HINT:

- COMPONENTS: See page 67-2
 - Installation is in the reverse order of removal.
1. REMOVE INSTRUMENT PANEL REGISTER ASSY NO.3 (SEE PAGE 71-7)
 2. REMOVE INSTRUMENT PANEL REGISTER ASSY NO.4 (SEE PAGE 71-7)
 3. REMOVE INSTRUMENT CLUSTER FINISH PANEL ASSY CENTER (SEE PAGE 71-7)
 4. REMOVE MULTI-DISPLAY ASSY (SEE PAGE 67-7)

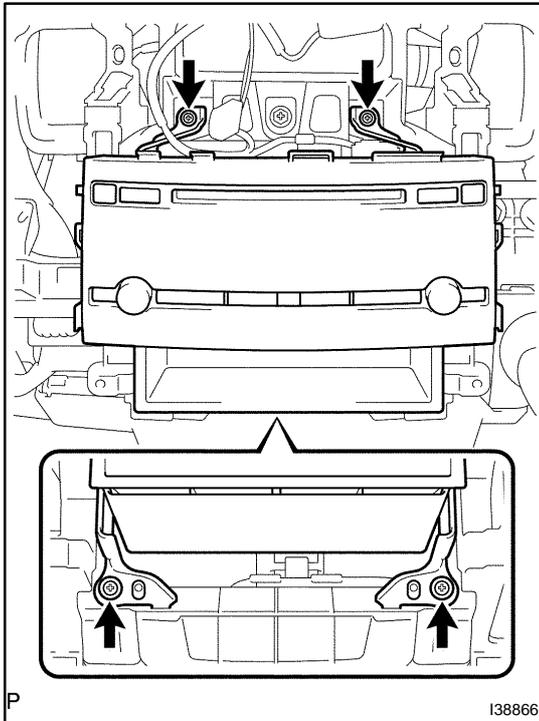


5. REMOVE RADIO RECEIVER ASSEMBLY W/BRACKET

- (a) Remove the 4 screws.
- (b) Disconnect the connector and remove the radio receiver-assembly w/ bracket.

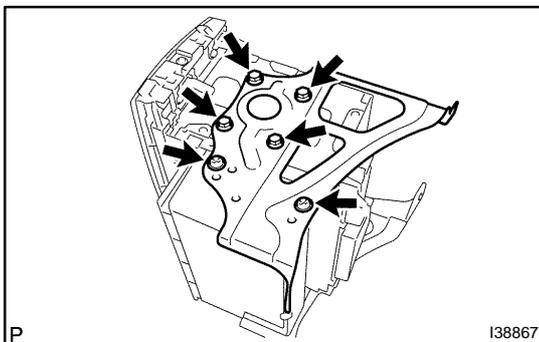

6. REMOVE RADIO BRACKET NO.1

- (a) Remove the 6 screws and radio bracket No.1.

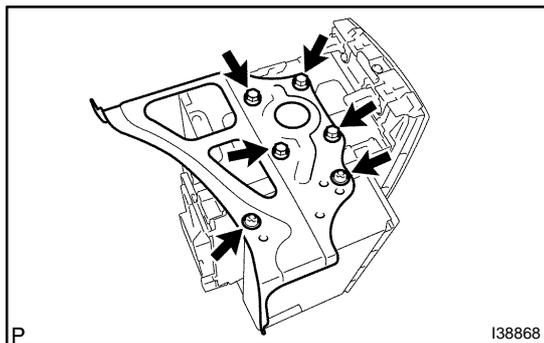**7. REMOVE RADIO BRACKET NO.2**

- (a) Remove the 6 screws and radio bracket No.2.

8. REMOVE RADIO RECEIVER ASSY