

## REMOVAL



1. **DISCONNECT CABLE FROM NEGATIVE BATTERY TERMINAL**

**CAUTION:**

Wait at least 90 seconds after disconnecting the cable from the negative (-) battery terminal to prevent airbag and seat belt pretensioner activation.

2. **REMOVE ACCELERATOR PEDAL ROD**

- (a) Disconnect the accelerator pedal position sensor connector.
- (b) Remove the 2 bolts and accelerator pedal rod.

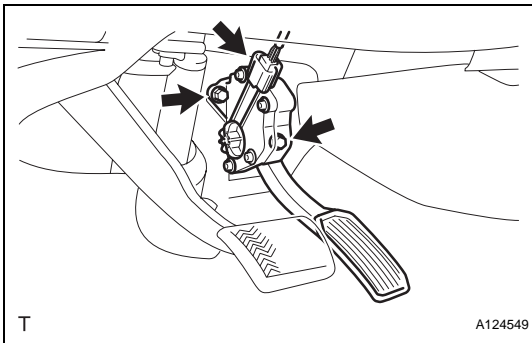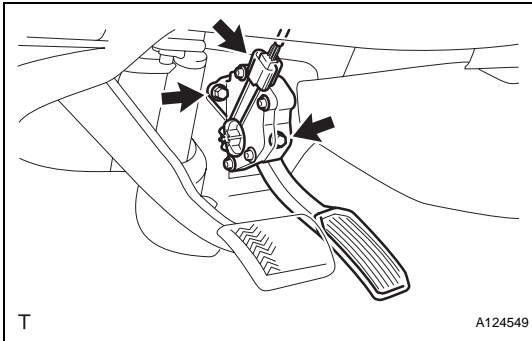

## INSTALLATION

1. **INSTALL ACCELERATOR PEDAL ROD**

- (a) Install the accelerator pedal rod with the 2 bolts.  
**Torque: 5.4 N\*m (55 kgf\*cm, 48 in.\*lbf)**
- (b) Connect the accelerator pedal position sensor connector.

2. **CONNECT CABLE TO NEGATIVE BATTERY TERMINAL**