


## POWER SOURCE CIRCUIT

### CIRCUIT DESCRIPTION

This circuit provides power to operate the transponder key ECU assy.

# WIRING DIAGRAM

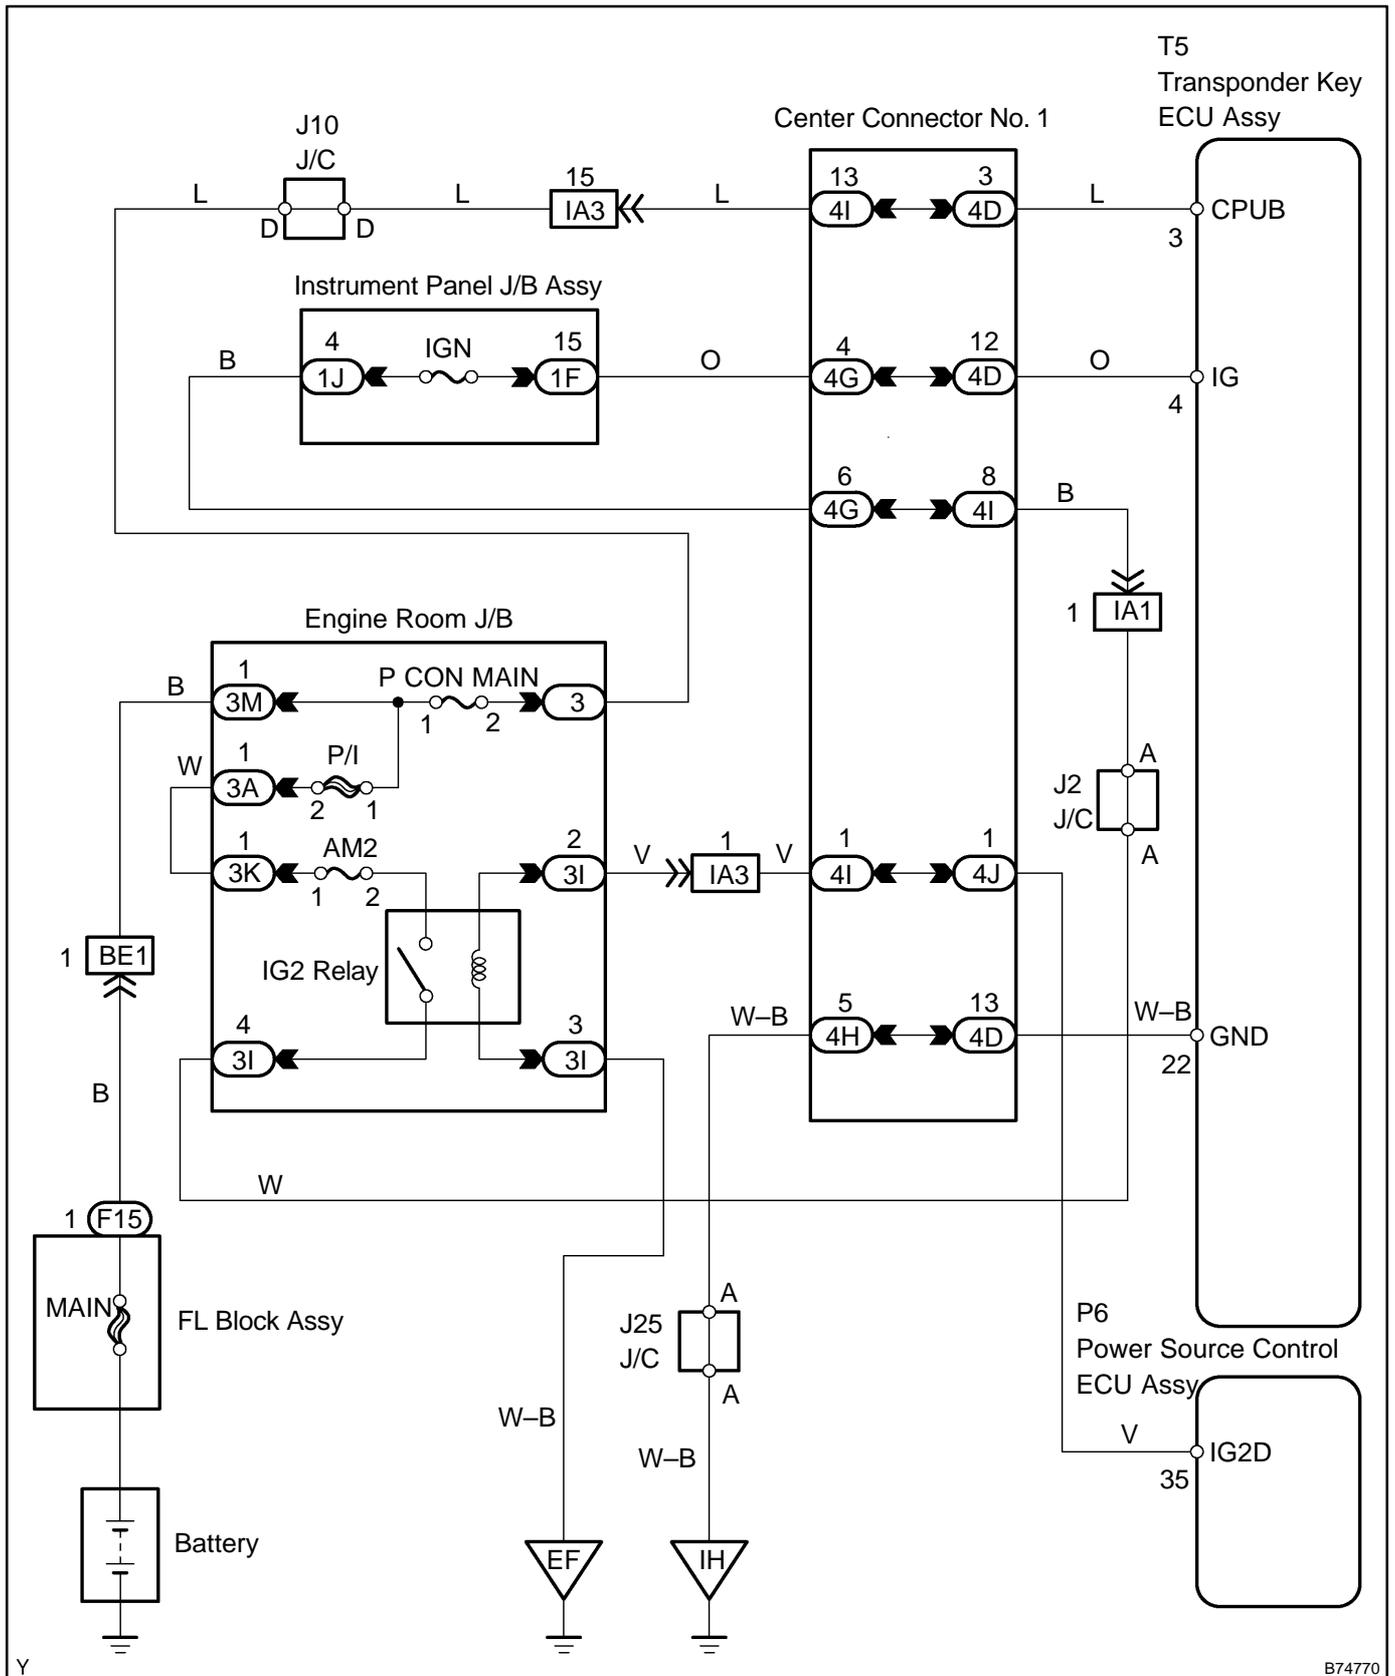

Y

B74770

## INSPECTION PROCEDURE

### 1 INSPECT FUSE (IGN, P CON MAIN, AM2)


- (a) Remove the IGN fuse from the instrument panel J/B Assy.
- (b) Remove the P CON MAIN and AM2 fuses from the engine room J/B.
- (c) Measure the resistance.

**Standard: Below 1 Ω**

**NG** → REPLACE FUSE

**OK**

### 2 CHECK WIRE HARNESS (TRANSPONDER KEY ECU ASSY – POWER SOURCE CONTROL ECU ASSY AND BODY GROUND)

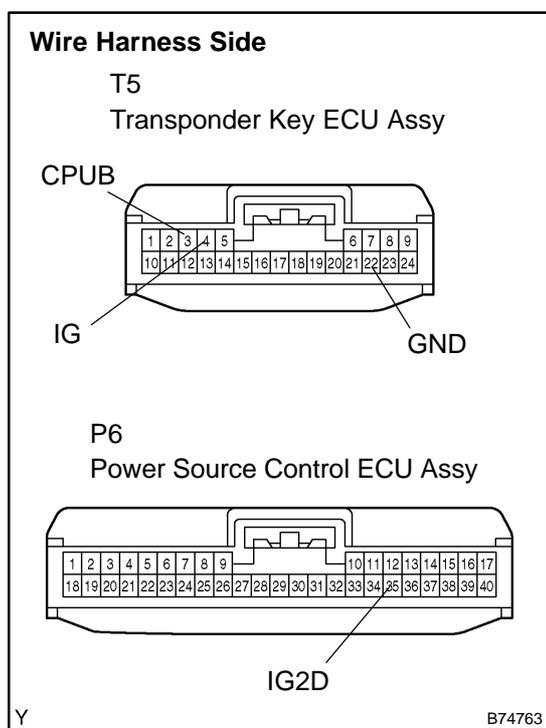

- (a) Disconnect the T5 and P6 ECU connectors.
- (b) Measure the resistance and voltage of the wire harness side connectors.

**Standard:**

Tester Connection	Condition	Specified Condition
T5-4 (IG) – Body ground	Power switch's power mode OFF <input type="checkbox"/> ON (IG)	0 V <input type="checkbox"/> 10 to 14 V
P6-35 (IG2D) – Body ground	Constant	Below 1 Ω
T5-3 (CPUB) – Body ground	Constant	10 to 14 V
T5-22 (GND) – Body ground	Constant	Below 1 Ω

**NG** → REPAIR OR REPLACE WIRE HARNESS AND CONNECTOR

**OK**

### PROCEED TO PUSH BUTTON START SYSTEM (See page 05-2420)